RT 46



Performance features

- For 24 V DC D+H smoke vent control panels
- Can be used as main or auxiliary operation panel
- For manually triggering a SHEV system in case of fire
- Function: SHEV OPEN, SHEV Reset
- Integrated ventilation button, optional

Approvals / Certificates

Details of approval on request.


VdS
G 510003

We reserve the right to make changes
Source: www.dh-partner.com, Status 08.10.2026

Technical data

	RT 46
Input voltage	18 … 28 V DC
Type of protection	IP40
Temperature range	-5 °C … +40 °C
Housing	Plastic
Colour	Orange (~ RAL 2011)
W x H x D	129 x 135 x 39 mm
Weight	0.3 kg
Remark	Complete SHEV operation panel
Art. No.	30.442.10

Example of application

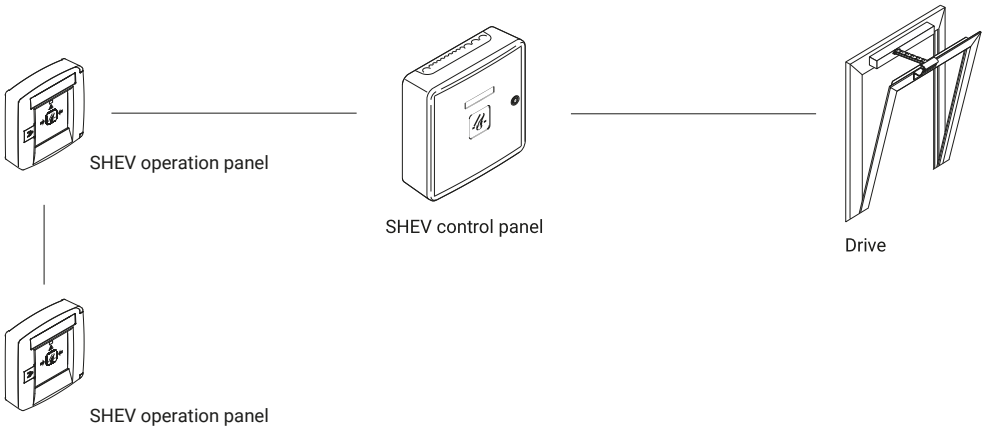

We reserve the right to make changes
Source: www.dh-partner.com, Status 08.10.2026